

Certificate of Conformity

Item and specifications: _____
Inspector: _____
Date of manufacture: _____

Warranty Card

Item: _____ Name: _____ Date of purchase: _____
Serial number: _____ Customer: _____ Tel: _____
Address: _____ Invoice: _____
Distributor: _____ Address: _____


DISCLAIMER

- 1 Alter or disassemble the unit.
- 2 Wear/tear on the out surface.
- 3 Misused or abused for anything other than normal consumer use as authorized in Pecron's current product literature.
- 4 Breakdown or damage caused by natural hazard beyond control (earthquake, fire, tsunami and etc.)
- 5 Warranty does not cover the packaging or accessories.
- 6 Paid service can be provided when warranty expired.

SAFETY INSTRUCTIONS


- 1 Do not store the generator near heat sources, or dispose of it into fire.
- 2 Do not immerse in water. Keep away from liquids and store it in a cool and dry place.
- 3 Do not store, charge or use the unit in an area exposed to flammable or corrosive gas
- 4 Keep the air vents at least 20cm away from any objects to prevent improper air flow
- 5 Always place the unit on a flat surface to avoid a fall off

T6000S Portable Power Station

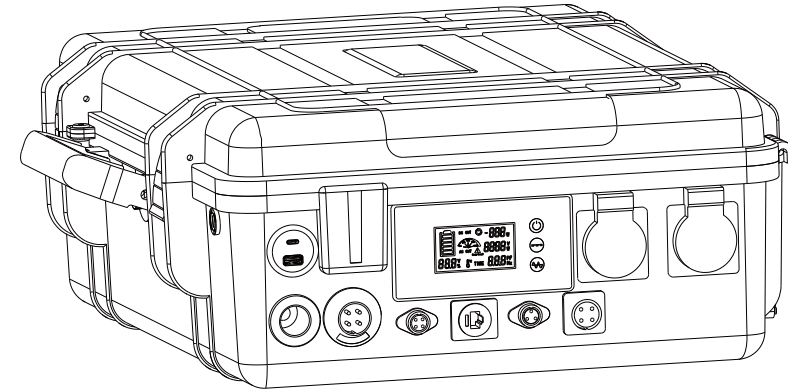

NOTICE


Please read the user manual carefully before using, and keep the purchase receipt as a proof of purchase for any warranty claim

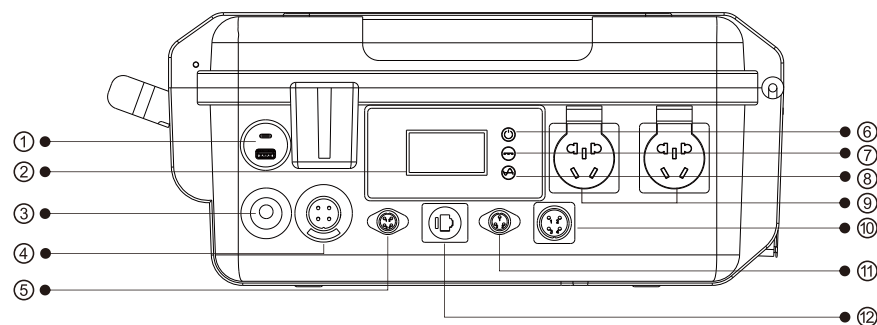

FUNCTION INTRODUCTION

- | | | |
|---------------------|-----------------|-------------------------|
| ① USB/USB-C Ports | ⑤ PV Input | ⑨ AC 220V/50Hz Outlets. |
| ② LCD Smart Display | ⑥ ON/OFF Switch | ⑩ DC 48V Outlet |
| ③ Cigar Port | ⑦ DC Switch | ⑪ DC 24V Outlet |
| ④ AC Input | ⑧ AC Switch | ⑫ RS485 Port |

LCD SMART DISPLAY

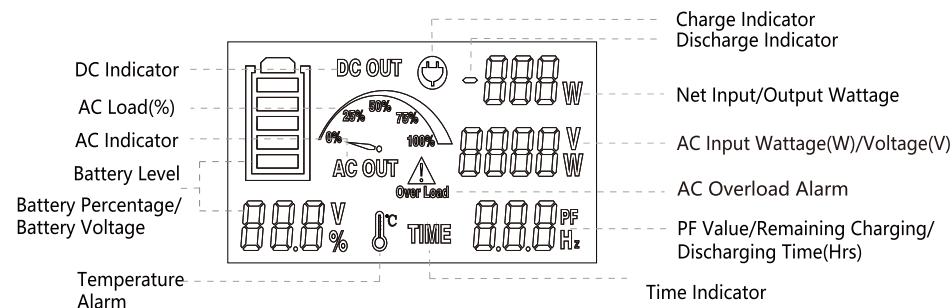

PACKAGE LIST

1	AC Charger	1
2	DC 24V(16MF-3A) Adapter	1
3	DC 48V(25MF-4A) Adapter	1
4	MC4 Solar Adapter	1
5	User Manual	1
6	DC1229 Car Charger	1

SPECIFICATIONS

Capacity	Battery Type	Charging Time	Protections	Temperature	Dimension	Net Weight
5397.84Wh (50.4V/107.1Ah)	Lithium-ion	7~8H	Over-voltage, Over-heat, Overload, Short-circuit, Self- recovery	0℃-45℃ (Charging) -20℃-45℃ (Discharging)	L580*W460*H2 50mm	44.25Kg

OUTPUT SPECS

AC Out	USB QC3.0	USB-C	25MF-4A Aviation Connector	16MF-3A Aviation Connector	Cigar Port
220V Rated 3000W	5V3.1A/9V2.1A /12V1.5A	5V3.1A/9V2.1A /12V1.5A	40~58.8V Maximum 10A 1、2Positive 3、4Negative	Regulated 24V Maximum 10A 1Positive 2Null 3Negative	12V10A

INPUT SPECS

AC Charging	Solar Charging	DC Charging
58.8V13A Maximum 20A	18V~55V Maximum 20A	29.4V Maximum 100W

FAQ

- 1 Why The LCD/Output Ports Are Unresponsive By Pressing Any Switches?
Interior battery self-protection activated, please recharge the unit
- 2 What To Do When There Is An Inaccurate Battery Level/System Crash?
Interference or battery loss, press and hold the AC button for 20 seconds to reset
- 3 Why The Unit Does Not Charge?
Over-heat protection activated, unplug the unit and it's connected devices, wait till the battery cool down
- 4 How To Store The Generator?
Keep the unit in a cool and dry place, and please charge it every 6 months if you leave the unit unused for a long period of time.
- 5 How To Clean The Generator?
Do not use chemicals or detergent to clean the unit, use a slightly damp towel to clean device and a dry with a soft cloth
- 6 Why There Is No Output From 48V/24V DC Outlet?
The fuse has been blown, please replace the fuse(glass fuse 6*30mm, 10amp) immediately